


# MERIT LAUREATE®

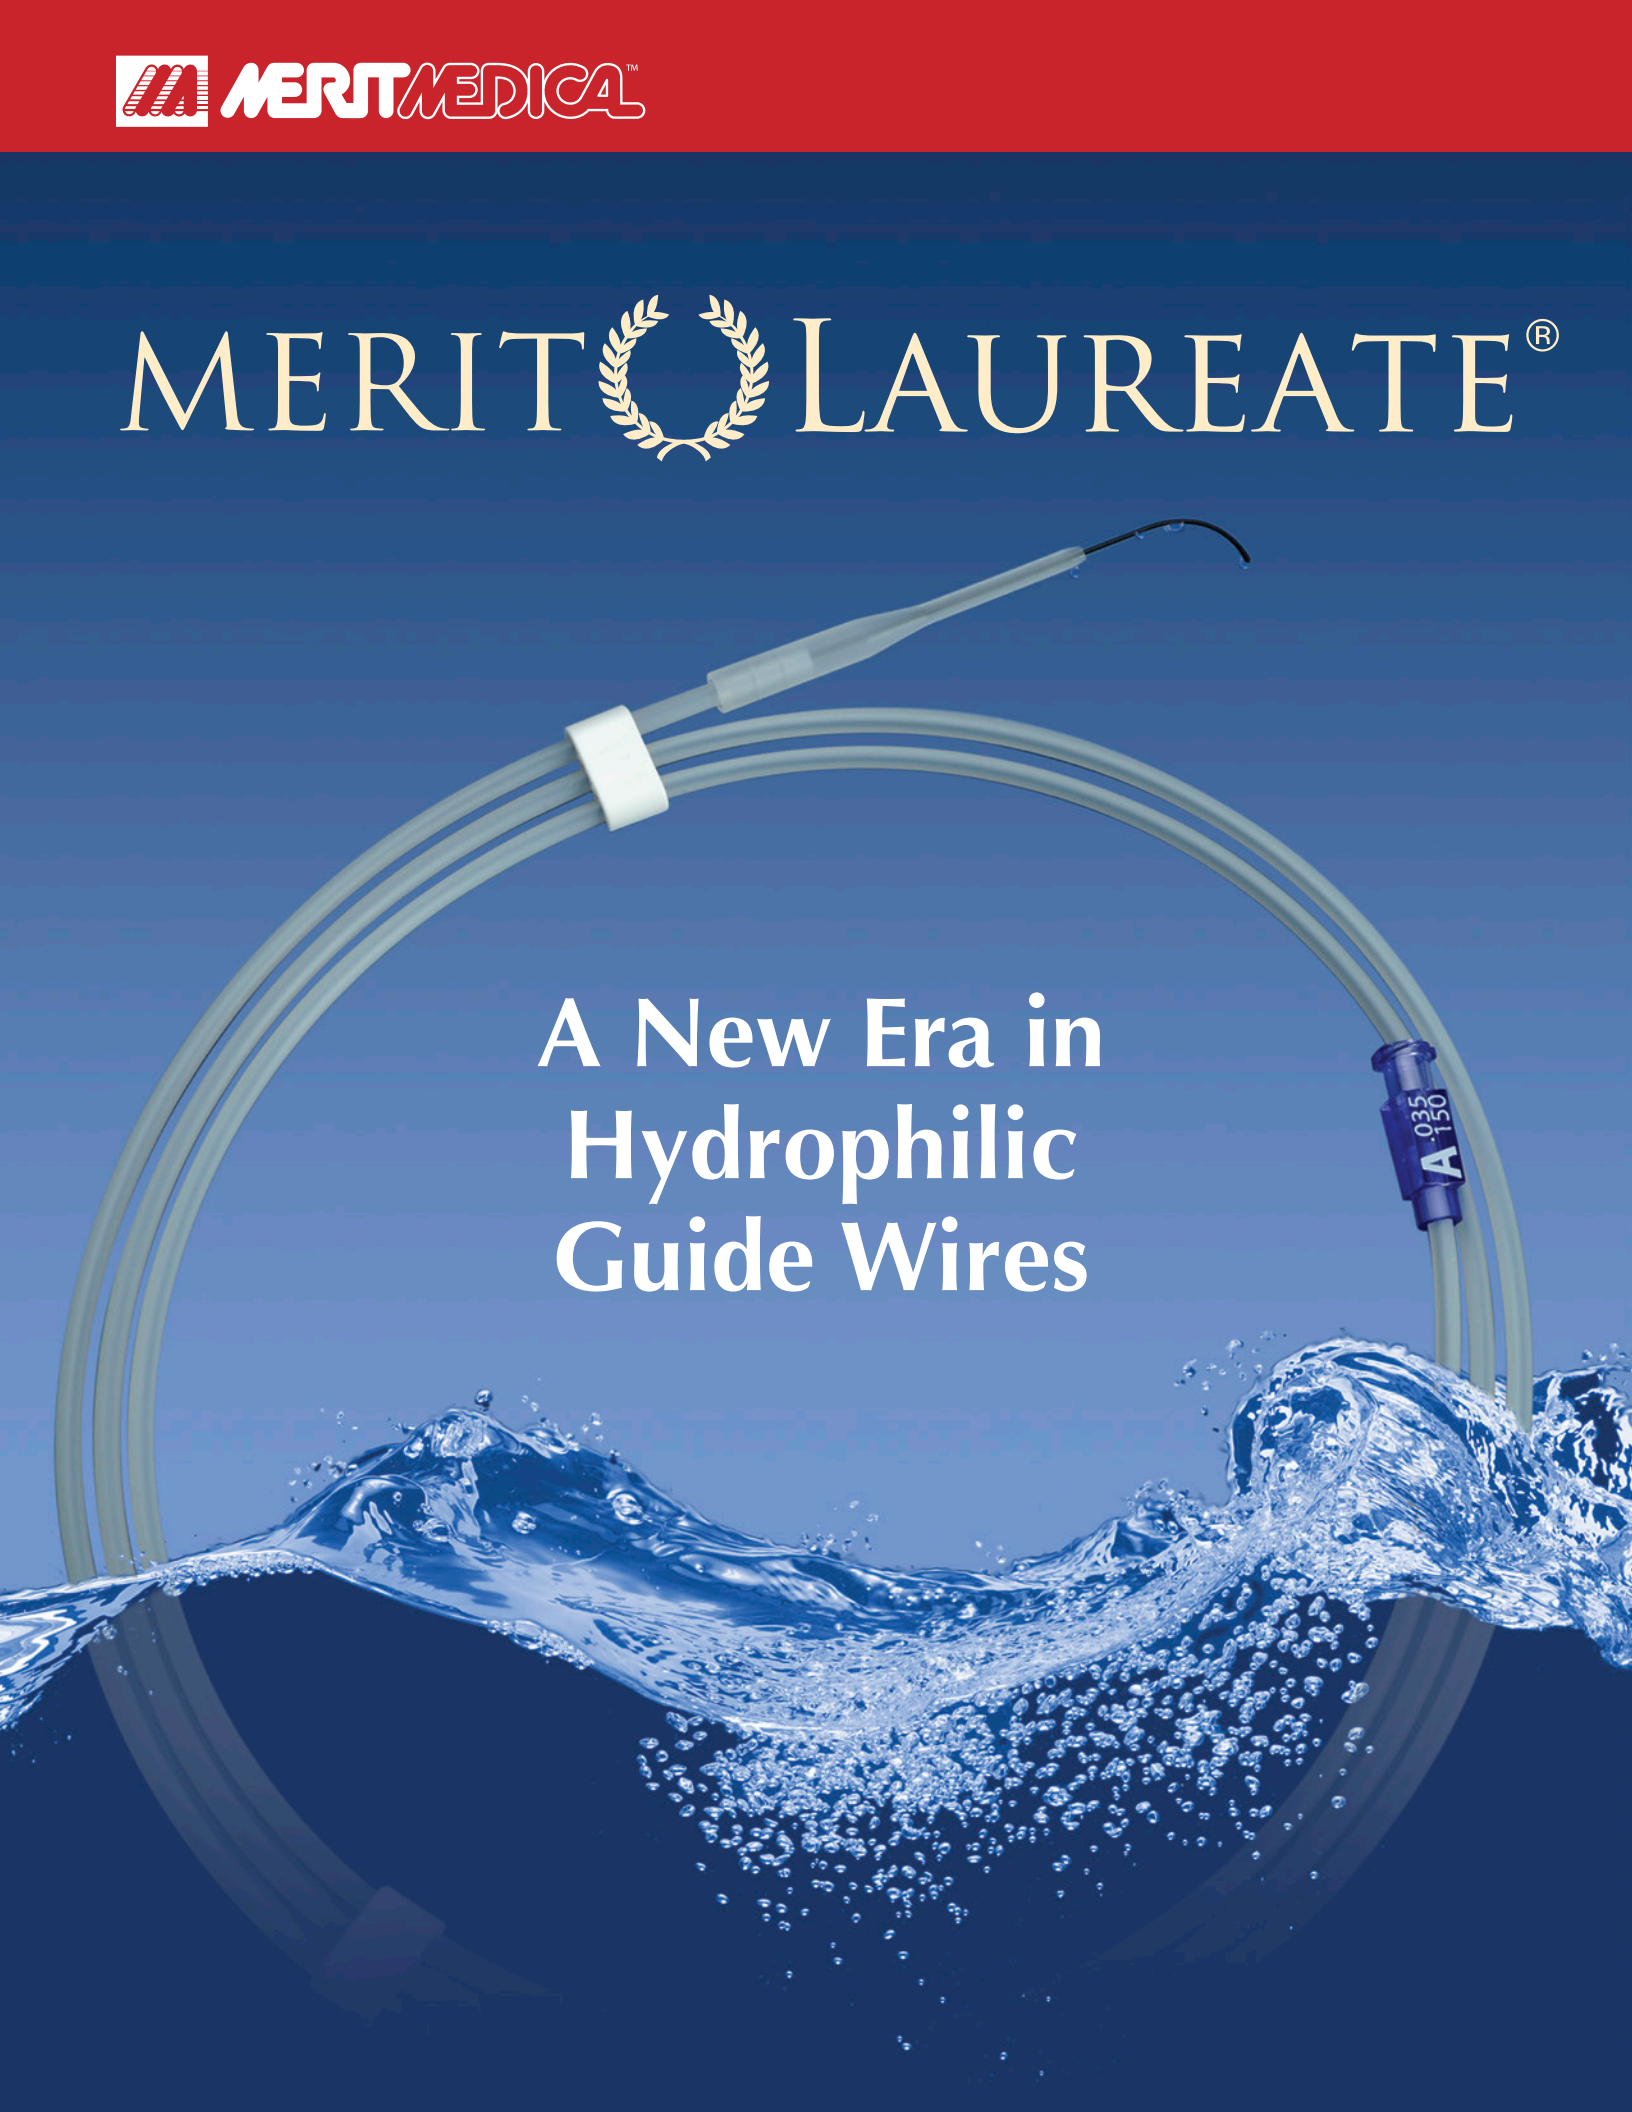

A New Era in  
Hydrophilic  
Guide Wires

# MERIT LAUREATE® A New Era

## MERIT'S COMMITMENT TO INNOVATION


- A State of the Art Manufacturing Facility
- Best in Class Engineering
- Elite In-House Material Chemists

## DECISIONS DRIVEN BY EVIDENCE

- Years of Research, Development and Quality Testing
- Consistent Surface Coating Adhesion Tip to Tip
- Enduring Lubricity
- Exclusive Technology that Significantly Reduces Wire Whipping


## RELIABLE AND ENDURING LUBRICITY

- Confidence to Navigate Highly Tortuous Vessels
- High Performance, Consistent Surface Coating
- Promotes Rapid Catheter Exchanges
- Minimizes Friction on the Wire Surface

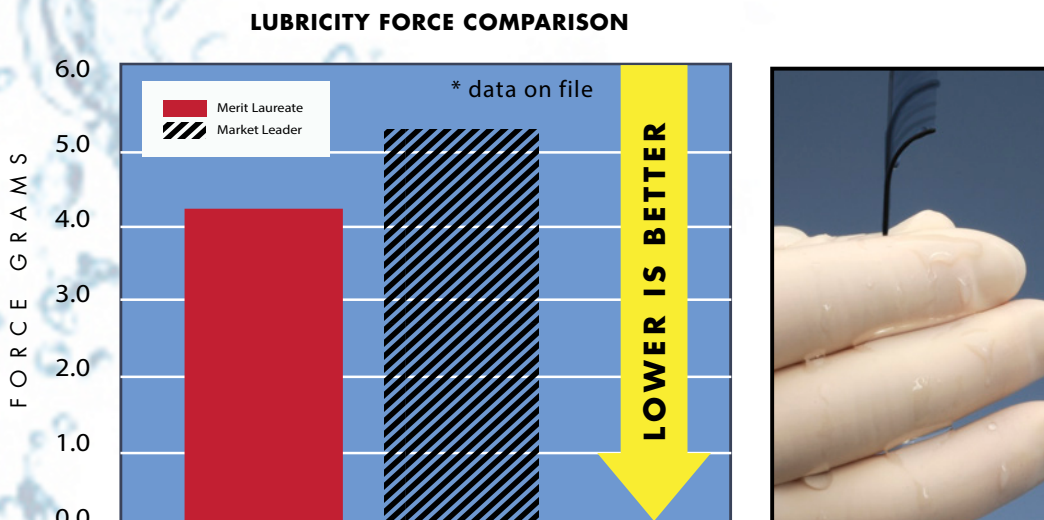


*Comparison testing against the market leader showed the Merit Laureate has a more lubricious surface with less drag force, thereby improving catheter compatibility.*

# in Hydrophilic Guide Wires

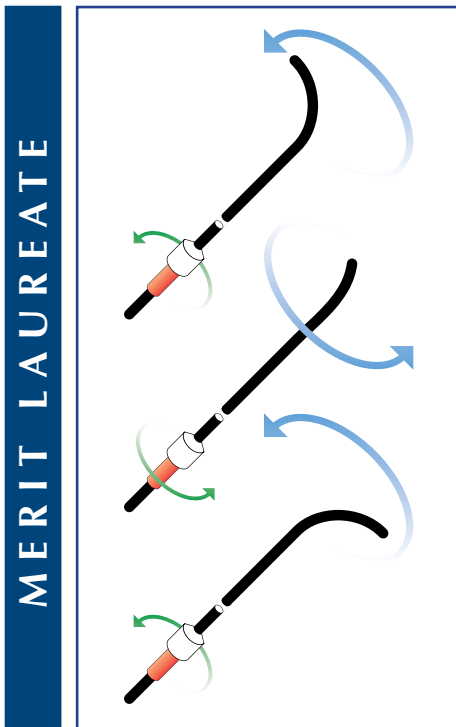

The Merit Laureate shows definitive turn for turn responsiveness (1:1 torque)

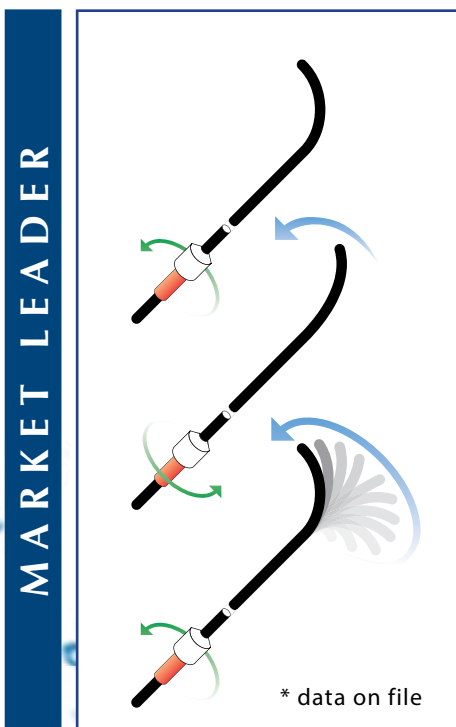


The market leader shows a slow torque response followed by rapid exaggerated movement.

## CLINICAL CRITERIA WITH THE PHYSICIAN IN MIND

- Exceptional Torque Control
- Greater Turn for Turn Responsiveness
- Rapid Vessel Selection
- Enhanced Lesion Crossability
- Dependable Visualization Under Fluoroscopy
- Stiff Configurations for Additional Support and Pushability

### TORQUE RESPONSE COMPARISON

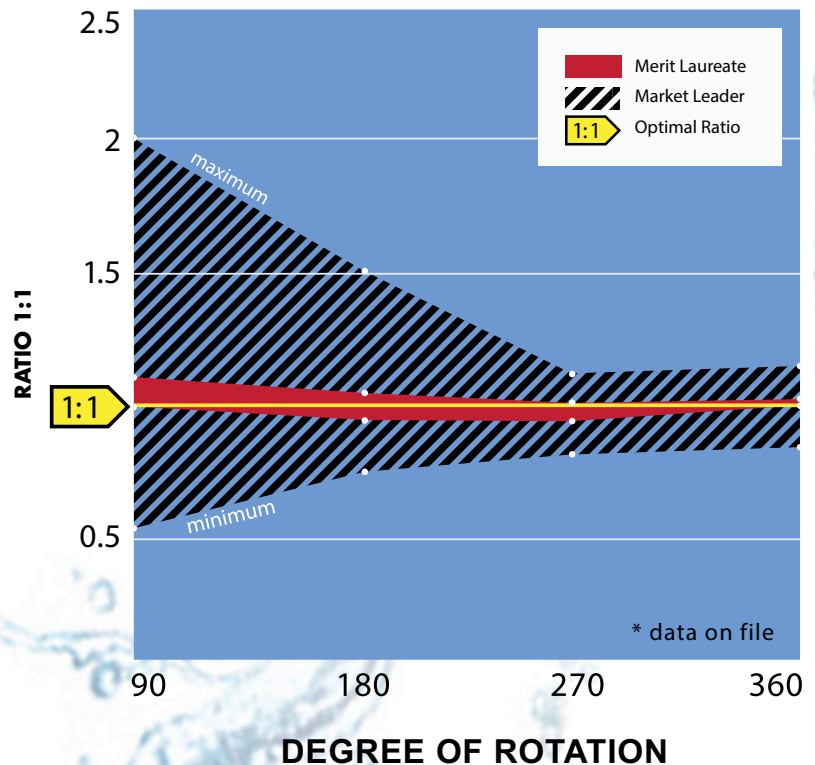

Comparative torque testing shows the Merit Laureate guide wire consistently meets the 1:1 torque target.

Now the choice is clear

**STANDARD HYDROPHILIC WIRES**

Catalog Number	Configuration	Tip Shape	Diameter	Length	Discription
<b>.035" Standard Angled:</b>					
LWSTDA3580	Standard	Angled	0.035" (0.89 mm)	80 cm	
LWSTDA35150	Standard	Angled	0.035" (0.89 mm)	150 cm	
LWSTDA35180	Standard	Angled	0.035" (0.89 mm)	180 cm	
LWSTDA35220	Standard	Angled	0.035" (0.89 mm)	220 cm	
LWSTDA35260EX	Standard	Angled	0.035" (0.89 mm)	260 cm	Exchange
<b>.035" Standard Straight:</b>					
LWSTDS35150	Standard	Straight	0.035" (0.89 mm)	150 cm	
LWSTDS35180	Standard	Straight	0.035" (0.89 mm)	180 cm	
LWSTDS35220	Standard	Straight	0.035" (0.89 mm)	220 cm	
LWSTDS35260EX	Standard	Straight	0.035" (0.89 mm)	260 cm	Exchange
<b>.035" Stiff Angled:</b>					
LWSTFA3580	Stiff	Angled	0.035" (0.89 mm)	80 cm	
LWSTFA35150	Stiff	Angled	0.035" (0.89 mm)	150 cm	
LWSTFA35180	Stiff	Angled	0.035" (0.89 mm)	180 cm	
LWSTFA35260EX	Stiff	Angled	0.035" (0.89 mm)	260 cm	Exchange
<b>.035" Stiff Straight:</b>					
LWSTFS35180	Stiff	Straight	0.035" (0.89 mm)	180 cm	
LWSTFS35260EX	Stiff	Straight	0.035" (0.89 mm)	260 cm	Exchange
<b>.038" Standard Angled:</b>					
LWSTDA3880	Standard	Angled	0.038" (0.97 mm)	80 cm	
LWSTDA38120	Standard	Angled	0.038" (0.97 mm)	120 cm	
LWSTDA38150	Standard	Angled	0.038" (0.97 mm)	150 cm	
LWSTDA38180	Standard	Angled	0.038" (0.97 mm)	180 cm	
LWSTDA38260EX	Standard	Angled	0.038" (0.97 mm)	260 cm	Exchange
<b>.038" Standard Straight:</b>					
LWSTDS38150	Standard	Straight	0.038" (0.97 mm)	150 cm	
LWSTDS38180	Standard	Straight	0.038" (0.97 mm)	180 cm	
LWSTDS38260EX	Standard	Straight	0.038" (0.97 mm)	260 cm	Exchange
<b>.038" Stiff Angled:</b>					
LWSTFA3880	Stiff	Angled	0.038" (0.97 mm)	80 cm	
LWSTFA38150	Stiff	Angled	0.038" (0.97 mm)	150 cm	
LWSTFA38180	Stiff	Angled	0.038" (0.97 mm)	180 cm	
<b>.038" Stiff Straight:</b>					
LWSTFS38150	Stiff	Straight	0.038" (0.97 mm)	150 cm	
LWSTFS38180	Stiff	Straight	0.038" (0.97 mm)	180 cm	
<b>.025" Standard Angled:</b>					
LWSTDA25150	Standard	Angled	0.025" (0.64 mm)	150 cm	
LWSTDA25180	Standard	Angled	0.025" (0.64 mm)	180 cm	
LWSTDA25260EX	Standard	Angled	0.025" (0.64 mm)	260 cm	Exchange
<b>.025" Standard Straight:</b>					
LWSTDS25150	Standard	Straight	0.025" (0.64 mm)	150 cm	
LWSTDS25180	Standard	Straight	0.025" (0.64 mm)	180 cm	
LWSTDS25260EX	Standard	Straight	0.025" (0.64 mm)	260 cm	Exchange

**COMING SOON PENDING REGULATORY APPROVAL**

<b>.018" Standard Angled:</b>					
LWSTDA1880	Standard	Angled	0.018" (0.46 mm)	80 cm	
LWSTDA18150	Standard	Angled	0.018" (0.46 mm)	150 cm	
LWSTDA18180	Standard	Angled	0.018" (0.46 mm)	180 cm	
LWSTDA18260EX	Standard	Angled	0.018" (0.46 mm)	260 cm	Exchange
<b>.018" Standard Straight:</b>					
LWSTDS18150	Standard	Straight	0.018" (0.46 mm)	150 cm	
LWSTDS18180	Standard	Straight	0.018" (0.46 mm)	180 cm	
LWSTDS18260EX	Standard	Straight	0.018" (0.46 mm)	260 cm	Exchange

Packaged 5 units per box

